


with floating cone to prevent galling of seat

LOCK SEAL FITTINGS

Double Ball Check - 2 Piece Metal-to-Metal Seal with Floating Cone to Prevent Galling of Seat

NOTE: This fitting is available as *Free Flow* style.

THREAD SIZE	MATERIAL	PART NO.	PLATING	HEAT TREATMENT	BALL	SPRING
3/4" NPT	1215	LS10N6-10	Zinc	---	**CA	302 SS
	316 SS	LS10N6-C0	---	Annealed (NACE)	K-Monel®	Inconel X-750
1/2" NPT	1215	LS10N4-10	Zinc	---	CA	302 SS
	316 SS	LS10N4-C0	---	Annealed (NACE)	K-Monel®	Inconel X-750
	4140	LS10N4-80	Zinc	Rc 22 Max (NACE)		
3/8" NPT	1215	LS10N3-10	Zinc	---	CA	302 SS
	316 SS	LS10N3-C0	---	Annealed (NACE)	K-Monel®	Inconel X-750
	4140	LS10N3-80	Zinc	Rc 22 Max (NACE)		
1/4" NPT	1215	LS10N2-10	Zinc	---	CA	302 SS
	316 SS	LS10N2-C0	---	Annealed (NACE)	K-Monel®	Inconel X-750
	4140	LS10N2-80	Zinc	Rc 22 Max (NACE)		

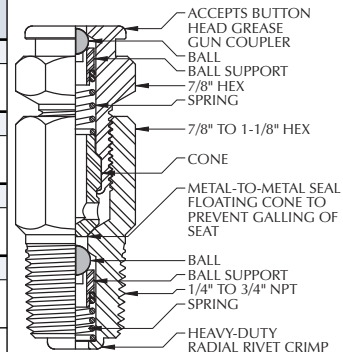

For Service to 10,000 PSI

**CA=AISI 52100 Chrome Alloy ~ Other materials and plating available upon request. PLEASE CONSULT FACTORY FOR PRODUCT AVAILABILITIES.

Willem Schoutenstraat 11 | 7825VV Emmen Nederland | T. +31 (0)591 676706 | F. +31 (0)591 676596 | E. info@jdtechniek.nl
 www.jdtechniek.nl | KvK 04086269 | BTW NL8179.27.803.B01 | IBAN NL27 RABO 0118 3377 26